





Ball-Lock Button Light-Duty



BBL_




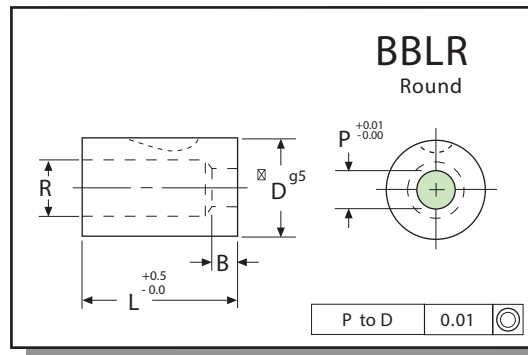


Ordering Example:
(10) BBLR 20-32 A2 P9,8

Ordering Example:
(10) BBLO 13-32 A2 P4.4 W1.3 BS-90°

A2, R/c 60-63 double tempered

Type	"D"	Land "B"	Length "L"	Min. "p"	Max. "p"	Max. "R"
BBLR	13	4.0	32	1.5	5.0	5.8
BBLR	16	5.0	32	3.2	7.2	8.0
BBLR	20	5.0	32	4.0	11.0	11.9
BBLR	25	6.0	32	8.0	15.0	16.0
BBLR	32	6.0	32	11.0	19.0	20.0
BBLR	38	8.0	32	16.5	26.0	27.0

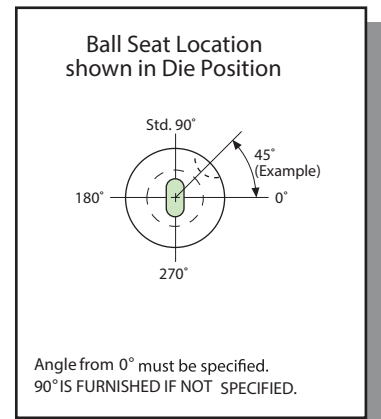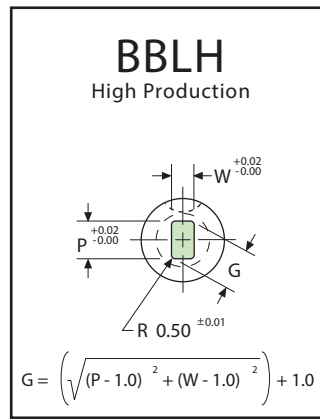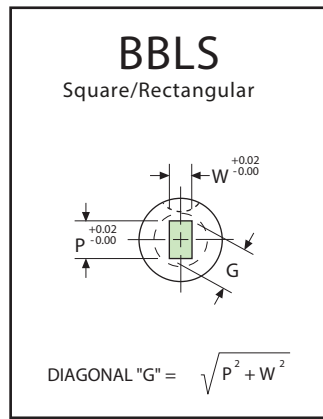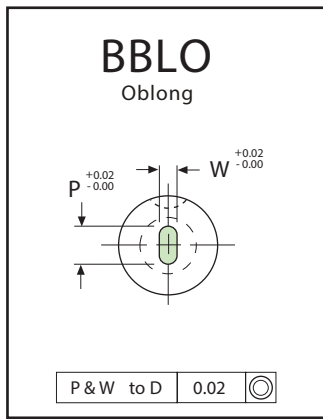

Type	"D"	Land "B"	Overall Length "L"	Min. "W"	Max. "P"/"G"	Max. "R"
BBL_	13	4.0	32	1.2	5.0	5.8
BBL_	16	5.0	32	2.0	7.2	8.0
BBL_	20	5.0	32	2.4	11.0	11.9
BBL_	25	6.0	32	4.0	15.0	16.0
BBL_	32	6.0	32	4.8	19.0	20.0
BBL_	38	8.0	32	6.4	26.0	27.0