



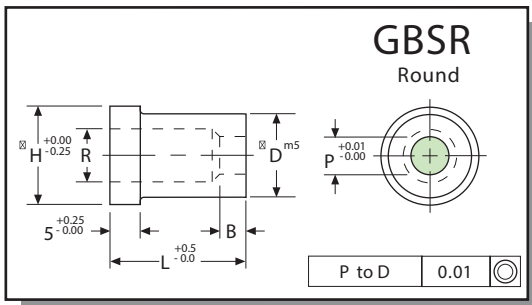

General Button Shoulder







Ordering Example:
(15) GBSR 13-28 A2 P4.5

Ordering Example:
(12) GBSO 16-20 A2 P6.9 W4.3 K2

A2, R/c 60-63 double tempered

Type	"D"	Land "B"	Overall Length "L"							Point Range "P"	Max. "R"	Head Dia. "H"
			20	22	25	28	30	32	35			
GBSR	10	4	20	22	25	28	30	32	35	1.5 – 5.0	5.8	13
GBSR	13	5	20	22	25	28	30	32	35	3.0 – 7.2	8.0	16
GBSR	16	5	20	22	25	28	30	32	35	5.0 – 8.8	9.5	19
GBSR	20	5	20	22	25	28	30	32	35	7.0 – 11.0	11.9	24
GBSR	22	6	20	22	25	28	30	32	35	9.0 – 13.8	14.7	26
GBSR	25	6	20	22	25	28	30	32	35	11.0 – 16.5	17.4	29
GBSR	32	6	20	22	25	28	30	32	35	13.0 – 19.8	20.6	36
GBSR	38	8	20	22	25	28	30	32	35	16.0 – 26.0	27.0	42

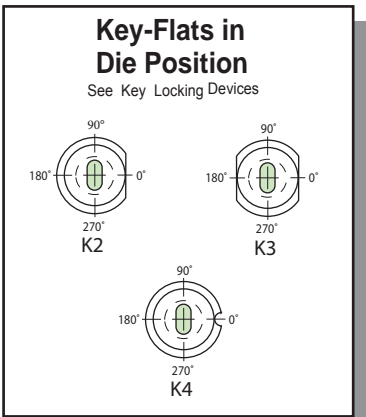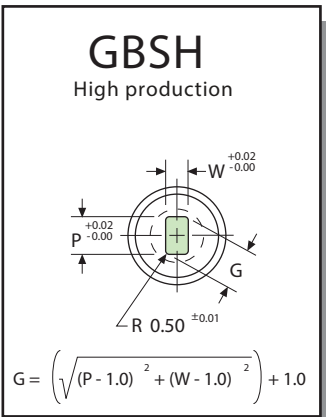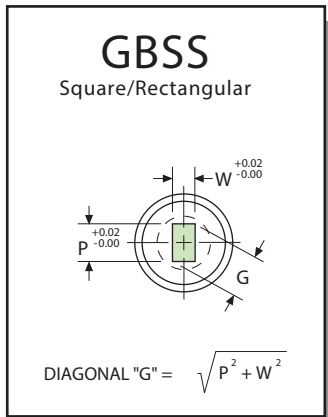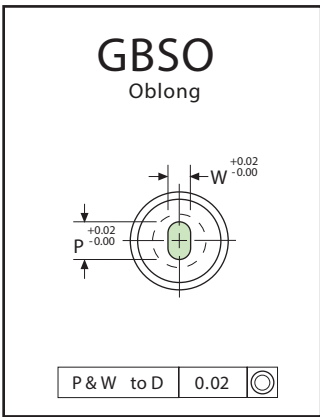

Type	"D"	Land "B"	Overall Length "L"							Min. "W"	Max. "P"/"G"	Max. "R"	Head Dia. "H"
			20	22	25	28	30	32	35				
GBS _	10	4	20	22	25	28	30	32	35	1.2	5.0	5.8	13
GBS _	13	5	20	22	25	28	30	32	35	2.0	7.2	8.0	16
GBS _	16	5	20	22	25	28	30	32	35	2.4	8.8	9.5	19
GBS _	20	5	20	22	25	28	30	32	35	3.2	11.0	11.9	24
GBS _	22	6	20	22	25	28	30	32	35	4.0	13.8	14.7	26
GBS _	25	6	20	22	25	28	30	32	35	4.8	16.5	17.4	29
GBS _	32	6	20	22	25	28	30	32	35	5.5	19.8	20.6	36
GBS _	38	8	20	22	25	28	30	32	35	6.4	26.0	27.0	42