



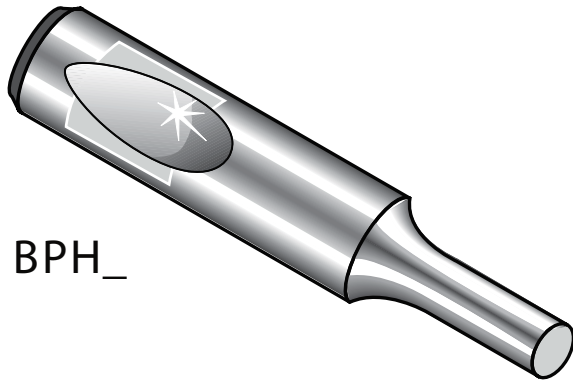

B all-Lock P unch H eavy-Duty










BPH_

Ordering Example:
(12) BPHR 13-13-71 M2 P10.1

Ordering Example:
(15) BPHO 20-19-80 M2 P18.2 W9.5 BS-90°

M2, R/c 60-63 triple tempered

Round P to D	0.01	
Shape P&W to D	0.02	

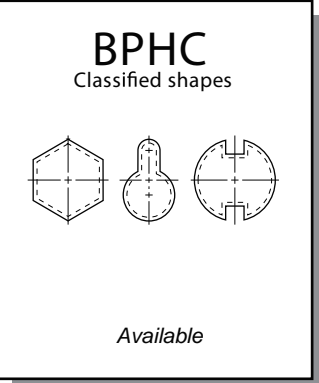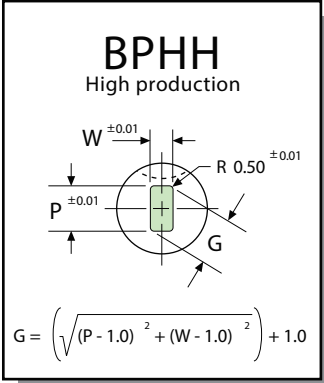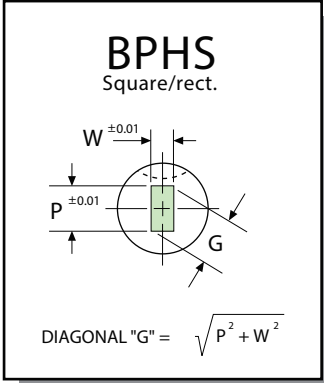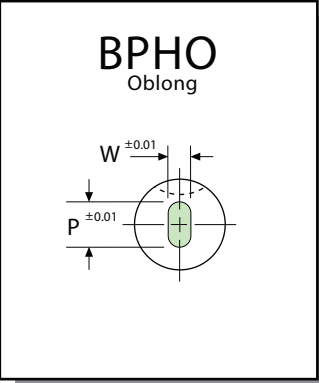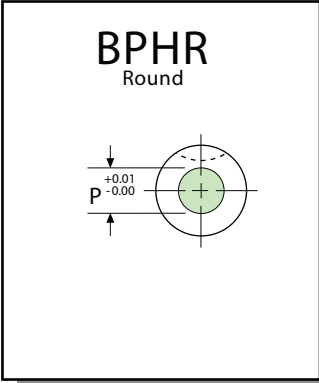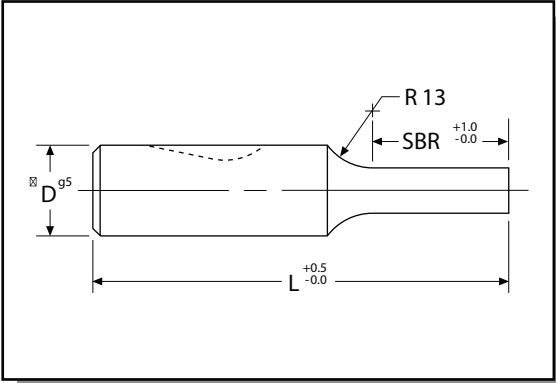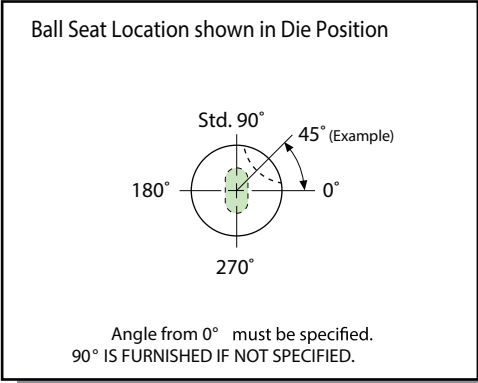

Type	"D"	Point Length "SBR"					Overall Length "L"							Round Min. "P"	Shape Min. "W"
		10	13	19	25	32	63	71	80	90	100	110	125		
BPH_	10	10	13	19			63	71	80	90	100			1.4	1.4
BPH_	13		13	19			63	71	80	90	100	110	125	2.1	2.1
BPH_	16		13	19	25		63	71	80	90	100	110	125	5.0	5.0
BPH_	20		13	19	25		63	71	80	90	100	110	125	6.0	6.0
BPH_	25		13	19	25			71	80	90	100	110	125	8.0	8.0
BPH_	32		13	19	25			71	80	90	100	110	125	10.0	10.0
BPH_	40			19	25	32			80	90	100	110	125	12.0	12.0