



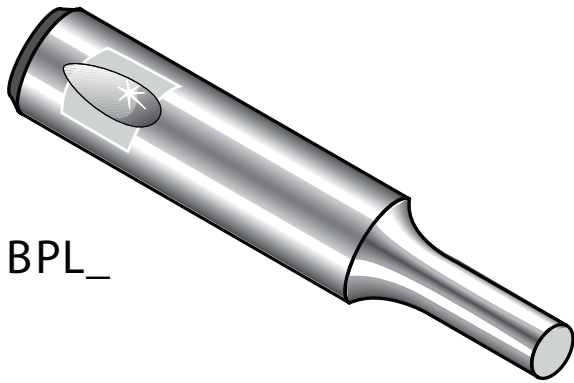

Ball-Lock PUNCH Light-Duty



BPL_








Ordering Example:
(12) BPLR 6-13-63 M2 P4.2

Ordering Example:
(15) BPLO 25-19-80 M2 P21.6 W12.2 BS-90°

A2, R/c 60-63 double tempered
M2, R/c 60-63 triple tempered

Round P to D	0.01	⊙
--------------	------	---

Shape P & W to D	0.02	⊙
------------------	------	---

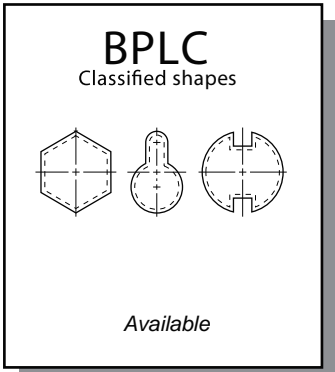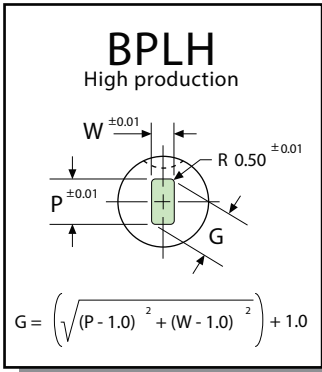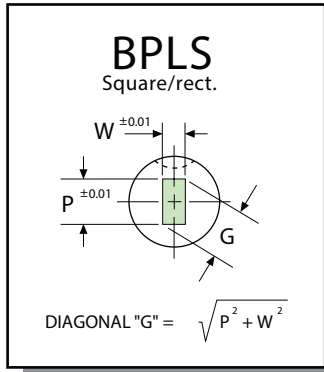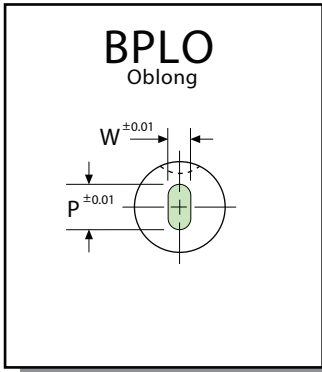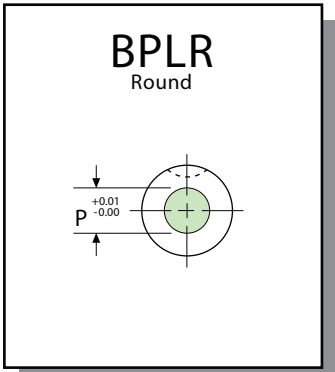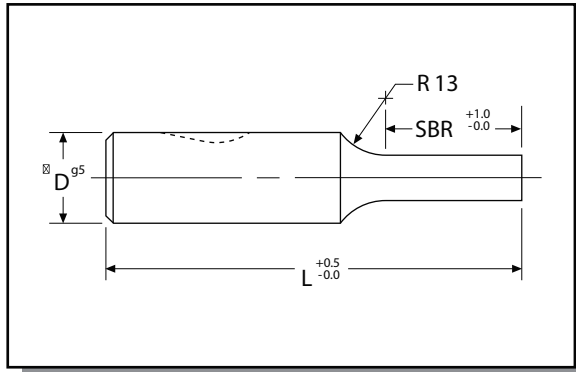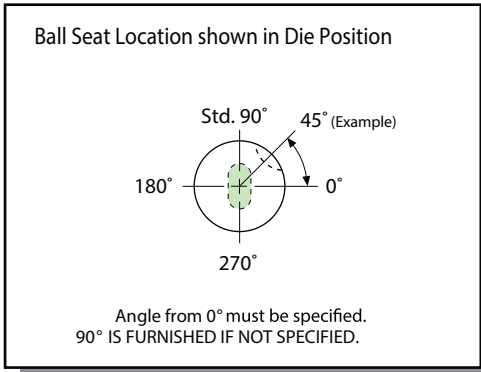

Type	"D"	Point Length "SBR"				Overall Length "L"							Round "P" min.	Shape "W" min.
		8	13	19	25	50	56	63	71	80	90	100		
BPL_	6	8	13			50	56	63	71	80			1.4	1.4
BPL_	10		13	19		50	56	63	71	80	90	100	1.4	1.4
BPL_	13		13	19		50	56	63	71	80	90	100	4.0	4.0
BPL_	16		13	19	25		56	63	71	80	90	100	6.0	6.0
BPL_	20		13	19	25		56	63	71	80	90	100	6.0	6.0
BPL_	25		13	19	25		56	63	71	80	90	100	8.0	8.0
BPL_	32		13	19	25				71	80	90	100	10.0	10.0
BPL_	38			19	25					80	90	100	12.0	12.0

L = 50, max. SBR = 13
L = 56, max. SBR = 19

Made better to last longer

All specifications, dimensions and design characteristics shown are subject to change without notice

Quality Craftsmanship Assured

Email: sales@diemouldequipment.com.au

Die Mould Equipment

Web: www.diemouldequipment.com.au

© The copyright in this material vests in Die Mould Equipment Pty Ltd and may not be reproduced, adapted or communicated without the express written permission of the copyright owner.