

# Forged Eye Bolts

- High quality U.S. forged eye bolts
- Shoulder design
- Shows full engagement
- Huge savings, always in stock!

**Material:** C1030 steel forged heat treated quenched and drawn


**Tensile strength:** 65,000 PSI min.

**Yield strength:** 50,000 PSI min.

**Elongation:** 30% min.

**Reduction of area:** 60% min.

**Warning:** Rated capacity is substantially reduced when loading at any angle greater than 45° from bolt centerline. At an angle of 45° rated capacity is reduced to ¼ of shown rating.

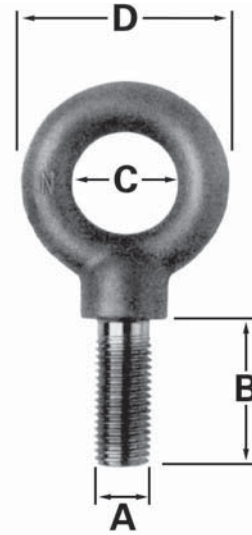

U.S. Thread (UNC-2A)			A-B-C-D Refer to Photo			
Part Number	Reference #	Safe Working Load [lbs]	Thread Size "A"	Shank Lgth "B"	Eye I.D. "C"	Eye O.D. "D"
EB250	EB21	500	¼-20	1"	¾"	1 ⅜"
EB312	EB22	900	⅝-18	1 ⅛"	⅞"	1 ⅞"
EB375	EB23	1300	⅜-16	1 ¼"	1"	1 11/16"
EB437	EB24	1800	7/16-14	1 ⅜"	1 1/16"	1 13/16"
EB500	EB25	2400	½-13	1 ½"	1 3/16"	2 1/8"
EB625	EB27	4000	⅝-11	1 ¾"	1 ⅜"	2 9/16"
EB750	EB28	5000	¾-10	2"	1 ½"	2 13/16"
EB875	EB29	7000	7/8-9	2 ¼"	1 5/8"	3 3/16"
EB1000	EB30	9000	1-8	2 ½"	1 13/16"	3 9/16"
EB1125	EB31	12000	1 ⅛-7	2 ¾"	2"	4 1/16"
EB1250	EB32	15000	1 ¼-7	3"	2 3/16"	4 7/16"
EB1500	EB34	21000	1 ½-6	3 ½"	2 ½"	5 3/16"
EB1750	-	28000	1 ¾-5	3 ¾"	2 7/8"	6"
EB2000	-	38000	2-4 ½	4"	3 ¼"	6 7/8"

Metric Sizes						
Part Number	Reference #	Safe Working Load [lbs]	Thread Size "A"	Shank Lgth "B"	Eye I.D. "C"	Eye O.D. "D"
EBM6	EBM6					
EBM8	EBM8	500	M8 × 1.25	16 mm	25 mm	43 mm
EBM10	EBM10	740	M10 × 1.5	20 mm	27 mm	46.0 mm
EBM12	EBM12	1030	M12 × 1.75	24 mm	30 mm	54.0 mm
EBM16	EBM16	1600	M16 × 2.0	32 mm	35 mm	65.0 mm
EBM20	EBM20	2860	M20 × 2.5	40 mm	41 mm	81.0 mm
EBM24	EBM24	3850	M24 × 3.0	48 mm	46 mm	90.4 mm
EBM30	EBM30	6400	M30 × 3.5	60 mm	55 mm	112.7 mm
EBM36	EBM36	8970	M36 × 4.0	72 mm	63 mm	131.8 mm
EBM42	-	11960	M42 × 4.5	84 mm	73 mm	152.4 mm
EBM48	-	16400	M48 × 5.0	96 mm	82 mm	174.6 mm