


Hoist Rings



- 100% magnetic particle inspected
- OSHA approved
- Minimum 5 to 1 safety factor in ratings
- Range of movement: swivel 360°, pivot 180°
- Meets Military Specification No. MIL-STD 1365 (11) or MIL-STD 209C.
- Independent laboratory tested
- Manufactured for over 25 years
- Mil. Spec. – Mil.-Std. 1365 (11) or -209C
- Don't accept "Look Alike" imitations

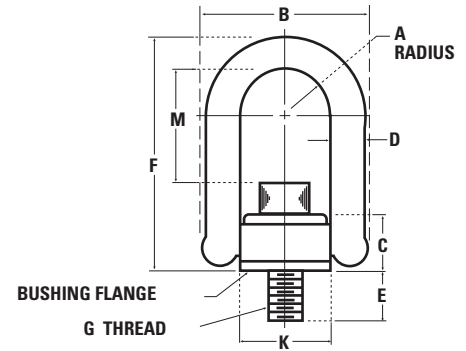


Hoist Rings vs. Eyebolts

Side or angle pulling forces can cause eyebolts to twist, bend or break when heavy, angular unbalanced loads are involved.

The quality you need at a price you can afford. American Drill Bushing is "The Name" in hoist rings. Made to OSHA specs, these hoist rings are often specifically required by many companies and marked by number on many blueprints. We've added many larger sizes and longer bolt lengths for your convenience. If you are looking for something we don't list, please ask one of our knowledgeable sales people, we can probably special order it for you.

Part Number	"G" Thread	Lbs. Cap.	Dimensions						Foot lbs.	Wt.	Spare Bolt w/Ring
			A	B	C	E	F	K			Part Number
33212	5/16-18	800	0.65	2.29	0.96	0.56	3.23	1.25	7	0.52	33252
33214	5/16-18	800	0.65	2.29	0.96	1.06	3.23	1.25	7	0.54	33254
33312	3/8-16	1000	0.65	2.29	0.96	.56	3.23	1.25	12	0.56	33352
33314	3/8-16	1000	0.65	2.29	0.96	1.06	3.23	1.25	12	0.58	33354
33515	1/2-13	2500	1.00	3.50	1.50	1.00	5.31	1.89	28	1.72	33555
33516	1/2-13	2500	1.00	3.50	1.50	1.25	5.31	1.89	28	1.82	33556
33614	5/8-11	4000	1.00	3.50	1.50	1.00	5.31	1.89	60	1.78	33654
33615	5/8-11	4000	1.00	3.50	1.50	1.25	5.31	1.89	60	1.88	33655
33714	3/4-10	5000	1.00	3.50	1.50	1.00	5.31	1.89	100	1.89	33754
33716	3/4-10	5000	1.00	3.50	1.50	1.50	5.31	1.89	100	2.02	33756
33102	3/4-10	7000	1.4	5.10	2.05	1.20	7.00	2.81	100	7.23	33122
33103	3/4-10	7000	1.4	5.10	2.05	1.45	7.00	2.81	100	7.25	33123
33101	7/8-9	8000	1.4	5.10	2.05	1.20	7.00	2.81	160	7.33	33121
33105	1-8	10000	1.4	5.10	2.05	1.45	7.00	2.81	230	7.57	33125
33106	1-8	10000	1.4	5.10	2.05	1.20	7.00	2.81	230	7.63	33126
33107	1-8	10000	1.4	5.10	2.05	2.20	7.00	2.81	230	7.81	33127
33401	1 1/4-7	15000	2	6.75	2.87	2.63	9.22	2.88	470	16	33421
33420	1 3/8-6	20000	2	6.75	2.87	2.63	9.22	2.88	670	17.2	
33424	1 1/2-6	24000	2	6.75	2.87	2.63	9.22	2.88	800	18.1	33422
33427	2-4 1/2	30000	2.25	8.00	2.81	2.96	12.47	4.20	800	36	
Metric sizes											
34212	M8 x 1.25	400	16.50	58.20	24.40	16	82	31.80		.24	33108
34312	M10 x 1.5	450	16.50	58.20	24.40	16	82	31.80		.25	33402
34515	M12 x 1.75	1050	25.40	88.90	38.10	25	134.9	48.00		.78	33521
34614	M16 x 2.0	1900	25.40	88.90	38.10	25	134.9	48.00		.81	33612
34714	M20 x 2.5	2200	25.40	88.90	38.10	25	134.9	48.00		.86	34101
34102	M24 x 3.0	4200	35.60	129.50	52.10	28	177.8	71.40		3.29	34103
34105	M30 x 3.5	4500	35.60	129.50	52.10	38	177.8	71.40		3.44	34107
34401	M30 x 3.5	7000	50.80	171.50	72.90	67	234.2	73.20		7.26	34214
34402	M36 x 4.0	11000	50.80	171.50	72.90	67	234.2	73.20		8.21	34314
34403	M42 x 4.5	12500	57.20	203.20	71.40	79	316.7	106.70		15.91	34516
34404	M48 x 5.0	13500	57.20	203.20	71.40	79	316.7	106.70		16.36	34615

Side Pull Hoist Rings

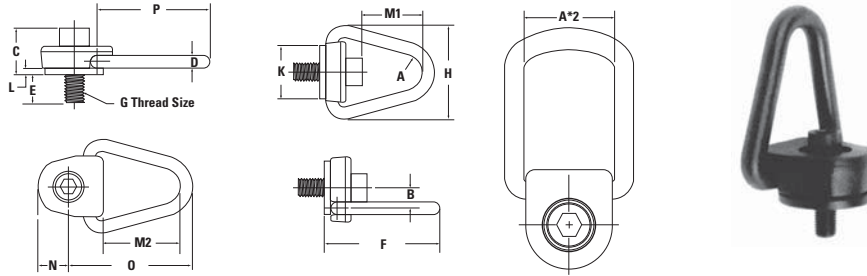

STANDARD

Part Number	Rated Load (KG)	G	A	B	C	D	E	F	H	K	L	M1	M2	N	O	P	TL ft/lbs
36305	800	5/16 - 18	3/4	7/8	1 21/64	1/2	.479	4 23/32	3 3/8	2 3/16	7/32	2 57/64	3 3/16	1 1/4	5 1/8	4 1/4	7
36310	1000	3/8 - 16	3/4	7/8	1 25/64	1/2	.479	4 23/32	3 3/8	2 3/16	7/32	2 27/32	3 3/16	1 1/4	5 1/8	4 1/4	12
36315	2500	1/2 - 13	3/4	7/8	1 17/32	1/2	.979	4 23/32	3 3/8	2 3/16	7/32	2 45/64	3 3/16	1 1/4	5 1/8	4 1/4	28
36320	4000	5/8 - 11	3/4	7/8	1 41/64	1/2	.979	4 23/32	3 3/8	2 3/16	7/32	2 59/64	3 3/16	1 1/4	5 1/8	4 1/4	60
36325	5000	3/4 - 10	3/4	7/8	1 25/32	1/2	1.229	4 23/32	3 3/8	2 3/16	7/32	2 15/16	3 3/16	1 1/4	5 1/8	4 1/4	100
36330	7000	3/4 - 10	7/8	1 1/4	2 1/4	3/4	1 1/4	6 1/4	5 1/4	3 3/8	5/16	4	4 3/16	1 5/8	6 3/4	5 5/8	100
36335	8000	7/8 - 9	7/8	1 1/4	2 3/8	3/4	1 1/4	6 1/4	5 1/4	3 3/8	5/16	3 3/8	4 3/16	1 5/8	6 3/4	5 5/8	160
36340	10000	1 - 8	7/8	1 1/4	2 1/2	3/4	1 1/2	6 1/4	5 1/4	3 3/8	5/16	3 3/4	4 3/16	1 5/8	6 3/4	5 5/8	230
36345	15000	1 1/4 - 7	3	2 1/4	4 7/16	1 1/4	1 5/16	12	8 1/2	5 3/4	9/16	6 15/16	8	3	13	11	470
36350	24000	1 1/2 - 6	3	2 1/4	4 11/16	1 1/4	3	12	8 1/2	5 3/4	9/16	6 11/16	8	3	13	11	800
36355	30000	2 - 4 1/2	3	2 1/4	5 3/16	1 1/4	3 5/16	12	8 1/2	5 3/4	9/16	6 3/16	8	3	13	11	800

Part Number	Description
36305	HDSP .8K LB 5/16-18 x .479TP
36310	HDSP 1K LB 3/8-16 x .479TP
36315	HDSP 2.5K LB 1/2-13 x .979TP
36320	HDSP 4K LB 5/8-11 x .979TP
36325	HDSP 5K LB 3/4-10 x 1.229TP
36330	HDSP 7K LB 3/4-10 x 1 1/4TP
36335	HDSP 8K LB 7/8-9 x 1 1/4TP
36340	HDSP 10K LB 1-8 x 1 1/2TP

- Self-aligning in the direction of the load
- Rotates 360°
- Alloy steel, blackoxide finish
- 100% magneticparticle inspected

METRIC

Part Number	Rated Load (KG)	G	A	B	C	D	E	F	H	K	L	M1	M2	N	O	P	TL N.M.
36805	400	M8 x 1.25	19	22	34	13	14	120	99	56	5	73	81	32	130	108	9.5
36810	450	M10 x 1.5	19	22	36	13	24	120	99	56	5	71	81	32	130	108	16.0
36815	1050	M12 x 1.75	19	22	38	13	37	120	99	56	5	69	81	32	130	108	37.0
36820	1900	M16 x 2.0	19	22	42	13	37	120	99	56	5	65	81	32	130	108	80.0
36825	2200	M20 x 2.5	19	22	46	13	37	120	99	56	5	61	81	32	130	108	135.0
36830	3000	M20 x 2.5	22	32	57	19	39	159	133	79	8	83	106	41	171	143	135.0
36835	4200	M24 x 3.0	22	32	61	19	43	159	133	79	8	79	106	41	171	143	311.0
36840	4500	M30 x 3.5	76	57	113	32	58	305	206	146	14	178	203	76	304	279	637.2
36845	11000	M36 x 4.0	76	57	113	32	78	305	206	146	14	172	203	76	304	279	1085.5
36850	12500	M42 x 4.5	76	57	113	32	80	305	206	146	14	166	203	76	304	279	1085.5
36855	13500	M48 x 5.0	76	57	113	32	80	305	206	146	14	166	203	76	304	279	1085.5

Part Number	Description
36805	400KG M8X1.25 x 14MMTP
36810	450KG M10X1.5 x 24MMTP
36815	1050KG M12X1.75 x 37MMTP
36820	1900KG M16X2.0 x 37MMTP
36825	2200KG M20X2.5 x 37MMTP
36830	3000KG M20X2.5 x 39MMTP
36835	4200KG M24X3.0 x 43MMTP